


Internet Connection Wizard

1. Click on the “Start” button and select “Control Panel”. Then click on “Internet Options” move to the “Connections” tab and click on the “Setup” button at the top of the screen. You will see the following screen. Press “Next” to continue




2. Select “Connect to the Internet” and press “Next” to continue.

<p>PR WebMasters (PRW.NET) PO Box 9111 San Juan, PR 00908</p> <p>Tel. (787) 723-5000 Fax (787) 722-6242 Toll Free 1-866-723-6800</p> <p>Support (787) 641-9800 Toll Free 1-866-641-0800</p>
--

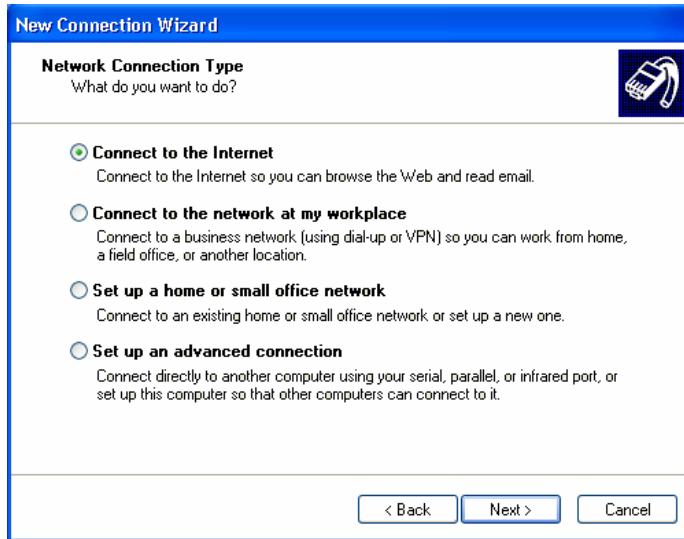

3. Select “Set up my connection manually”. Press “Next” to continue.

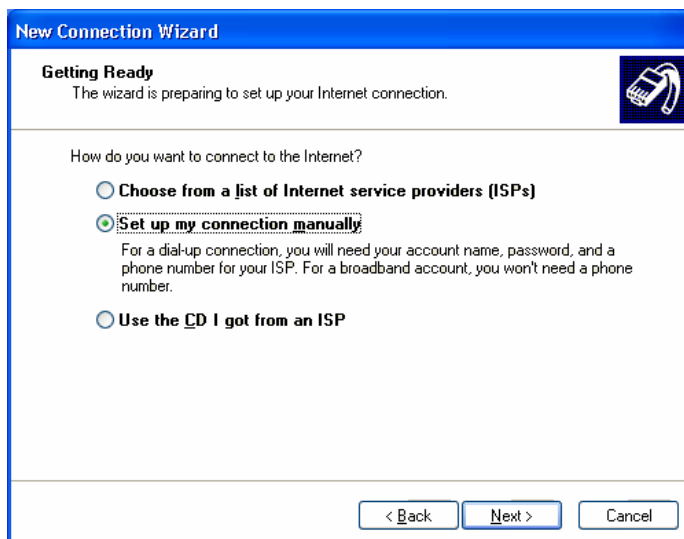

4. Select “Connect using a dial-up modem”. Press “Next” to continue

The screenshot shows the 'New Connection Wizard' dialog box with the title 'New Connection Wizard'. The main heading is 'Internet Connection' with the subtext 'How do you want to connect to the Internet?'. There is a modem icon in the top right corner. Three radio button options are listed: 1. 'Connect using a dial-up modem' (selected), with the description 'This type of connection uses a modem and a regular or ISDN phone line.' 2. 'Connect using a broadband connection that requires a user name and password', with the description 'This is a high-speed connection using either a DSL or cable modem. Your ISP may refer to this type of connection as PPPoE.' 3. 'Connect using a broadband connection that is always on', with the description 'This is a high-speed connection using either a cable modem, DSL or LAN connection. It is always active, and doesn't require you to sign in.' At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'.

5. Enter “PRW” as the connection name. Press “Next” to continue.

The screenshot shows the 'New Connection Wizard' dialog box with the title 'New Connection Wizard'. The main heading is 'Connection Name' with the subtext 'What is the name of the service that provides your Internet connection?'. There is a modem icon in the top right corner. The text says 'Type the name of your ISP in the following box.' Below this is a label 'ISP Name' and a text input field containing 'PRW'. Below the input field, it says 'The name you type here will be the name of the connection you are creating.' At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'.


6. Enter the access number depending on your area or service according to the Access Number List (see next page for the telephone numbers). If you are in the San Juan metro area, enter 787-641-9000. Press “Next” to continue.

The screenshot shows the 'New Connection Wizard' dialog box with the title 'New Connection Wizard'. The main heading is 'Phone Number to Dial' with the subtext 'What is your ISP's phone number?'. There is a modem icon in the top right corner. The text says 'Type the phone number below.' Below this is a label 'Phone number:' and an empty text input field. Below the input field, it says 'You might need to include a "1" or the area code, or both. If you are not sure you need the extra numbers, dial the phone number on your telephone. If you hear a modem sound, the number dialed is correct.' At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'.

NOTE: You are responsible for determining the appropriate number for your location. ISP is not responsible for any long distance telephone charges.

7. Type the username and password you selected in the application form. Make sure the top two boxes are checked. Press “Next” to continue.

Select “Finish” on the following screen to complete the Dialup configuration.

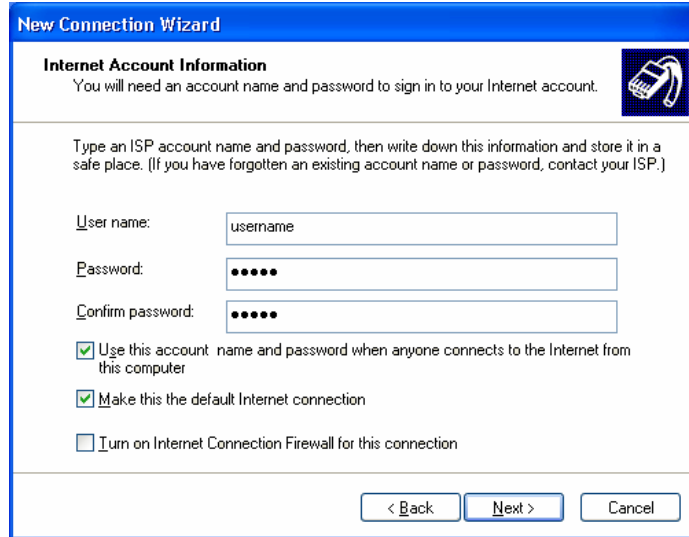


The screenshot shows the 'New Connection Wizard' window with the 'Internet Account Information' tab selected. The window title is 'New Connection Wizard'. Below the title bar, the text reads 'Internet Account Information' and 'You will need an account name and password to sign in to your Internet account.' There is a small icon of a hand holding a pen. Below this, it says 'Type an ISP account name and password, then write down this information and store it in a safe place. (If you have forgotten an existing account name or password, contact your ISP.)' There are three input fields: 'User name:' with 'username' entered, 'Password:' with five dots, and 'Confirm password:' with five dots. Below the fields are three checkboxes: 'Use this account name and password when anyone connects to the Internet from this computer' (checked), 'Make this the default Internet connection' (checked), and 'Turn on Internet Connection Firewall for this connection' (unchecked). At the bottom are three buttons: '< Back', 'Next >', and 'Cancel'.

Email Setup


1. In Outlook Express click on “Tools” and select “Accounts” from the menu. Then go to the “Mail” tab and click on “Add” and then “Mail”.

Enter the name you would like to use for email and click “Next”. Most people select their first name and last names. You can also choose a nickname or your family name (E.g. Familia Perez).

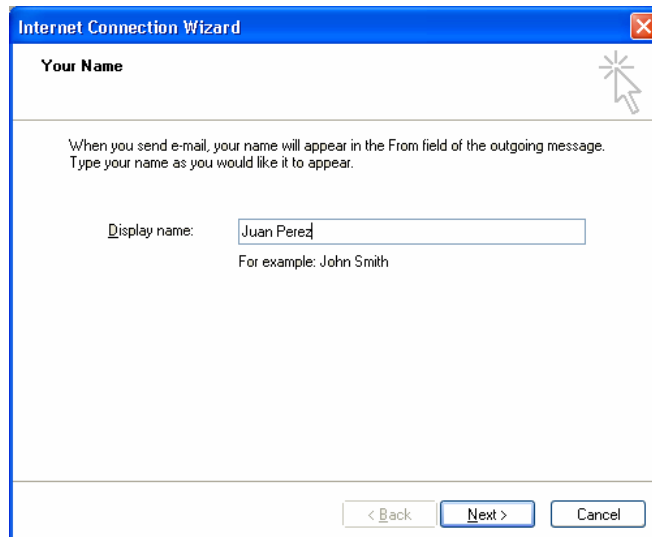

The screenshot shows the 'Internet Connection Wizard' window with the 'Your Name' tab selected. The window title is 'Internet Connection Wizard'. Below the title bar, the text reads 'Your Name'. There is a small icon of a hand holding a pen. Below this, it says 'When you send e-mail, your name will appear in the From field of the outgoing message. Type your name as you would like it to appear.' There is one input field: 'Display name:' with 'Juan Perez' entered. Below the field is the text 'For example: John Smith'. At the bottom are three buttons: '< Back', 'Next >', and 'Cancel'.

3. Enter your email address and click “Next”. The format is username@prw.net where username is the user name you selected in the application form. Note that these should be in lower case.

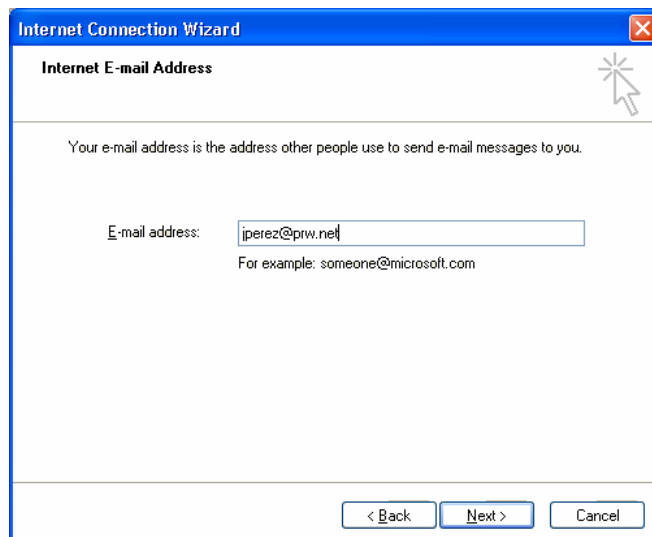

The screenshot shows the 'Internet Connection Wizard' window with the 'Internet E-mail Address' tab selected. The window title is 'Internet Connection Wizard'. Below the title bar, the text reads 'Internet E-mail Address'. There is a small icon of a hand holding a pen. Below this, it says 'Your e-mail address is the address other people use to send e-mail messages to you.' There is one input field: 'E-mail address:' with 'jperez@prw.net' entered. Below the field is the text 'For example: someone@microsoft.com'. At the bottom are three buttons: '< Back', 'Next >', and 'Cancel'.

4. Enter the server names shown below and click “Next”. If you would to use IMAP on server type, enter imap.prw.net for your incoming mail server. Note that these should be in lower case.

Incoming: pop.prw.net
Outgoing: smtp.prw.net

The screenshot shows the 'E-mail Server Names' step of the Internet Connection Wizard. It features a dropdown menu for 'My incoming mail server is a' set to 'POP3'. Below it are two text input fields: 'Incoming mail (POP3, IMAP or HTTP) server:' containing 'pop.prw.net' and 'Outgoing mail (SMTP) server:' containing 'smtp.prw.net'. At the bottom are buttons for '< Back', 'Next >', and 'Cancel'.

5. Enter the account name and password you selected on the application form and click “Next”. Note that these should be in lower case.

The screenshot shows the 'Internet Mail Logon' step. It has two text input fields: 'Account name:' with 'jperez' and 'Password:' with masked characters. A checked checkbox labeled 'Remember password' is present. Below is a checkbox for 'Log on using Secure Password Authentication (SPA)' which is unchecked. At the bottom are buttons for '< Back', 'Next >', and 'Cancel'.

6. Select “Finish” ending the Wizard and then clicking “Close”, to exit the Internet Accounts Window.

You are now ready connect to the Internet. If you have any problems please make a note of any error messages and contact our support department at 787-641-9800 or 1-866-641-0800

The screenshot shows the 'Congratulations' step. It displays the message: 'You have successfully entered all of the information required to set up your account. To save these settings, click Finish.' At the bottom are buttons for '< Back', 'Finish', and 'Cancel'.

General Setup Parameters

Access Numbers					
	Analog	ISDN		Analog	ISDN
Adjuntas	939-201-9000	939-201-9200	Lajas	939-214-9000	939-214-9200
Aguada	787-589-9050	787-589-9200	Lares	787-563-9000	787-563-9200
Aguadilla	787-658-9000	787-658-9200	Las Marías	939-394-9000	939-394-9200
Aguas Buenas	787-924-9000	787-924-9200	Las Piedras	787-912-9000	787-912-9200
Aibonito	787-954-9000	787-954-9200	Loiza 256/957	787-957-9000	787-957-9200
Añasco	787-229-9000	787-229-9200	Luquillo	787-355-9000	787-355-9200
Arecibo	787-650-9000	787-650-9200	Manatí	787-621-9000	787-621-9200
Arroyo	939-307-9000	939-307-9200	Maricao	939-910-9000	939-910-9200
Barceloneta	787-623-9000	787-623-9200	Maunabo	939-329-9000	939-329-9200
Barranquitas	787-947-9000	787-947-9200	Mayagüez	787-652-9000	787-652-9200
Cabo Rojo	787-357-9000	787-357-9200	Moca	787-551-9000	787-551-9200
Caguas	787-653-9000	787-653-9200	Morovis	787-369-9000	787-369-9200
Camuy	787-544-9000	787-544-9200	Naguabo	787-465-9000	787-465-9200
Canóvanas	787-957-9000	787-957-9200	Naranjito	787-227-9000	787-227-9200
Cayey	787-535-9000	787-535-9200	Orocovis	939-212-9000	939-212-9200
Ceiba	787-534-9000	787-534-9200	Patillas	939-307-9000	939-307-9200
Ciales	787-917-9000	787-917-9200	Peñuelas	787-928-9000	787-928-9200
Cidra	787-434-9000	787-434-9200	Ponce	787-651-9000	787-651-9200
Coamo	787-471-9000	787-471-9200	Quebradillas	787-291-9000	787-291-9200
Comerio	787-695-9000	787-695-9200	Rincón	939-697-9000	939-697-9200
Corozal	787-693-9000	787-693-9200	Rio Grande	787-657-9000	787-657-9200
Culebra	787-952-9000	787-952-9200	Sabana Grande	787-978-9000	787-978-9200
Dorado	787-626-9000	787-626-9200	Salinas	787-537-9000	787-537-9200
Fajardo	787-655-9000	787-655-9200	San Germán	787-659-9000	787-659-9200
Florida	939-440-9000	939-440-9200	San Juan	787-641-9000	787-641-9200
Guánica	787-569-9000	787-569-9200	San Lorenzo	787-937-9000	787-937-9200
Guayama	787-686-9000	787-686-9200	San Sebastián	787-926-9000	787-926-9200
Guayanilla	787-927-9000	787-927-9200	Santa Isabel	787-971-9000	787-971-9200
Gurabo	787-687-9000	787-687-9200	Toa Alta	787-545-9000	787-545-9200
Hatillo 262/989	787-544-9000	787-544-9200	Utua	787-933-9000	787-933-9200
Hormigueros	787-935-9000	787-935-9200	Vega Alta	787-915-9000	787-915-9200
Humacao	787-656-9000	787-656-9200	Vega Baja	787-654-9000	787-654-9200
Isabela	787-609-9000	787-609-9200	Vieques	787-968-9000	787-968-9200
Jayuya	787-588-9000	787-588-9200	Villalba	939-731-9000	939-731-9200
Juana Díaz	787-580-9000	787-580-9200	Yabucoa	787-953-9000	787-953-9200
Juncos	787-561-9000	787-561-9200	Yauco	787-992-9000	787-992-9200

NOTE: You are responsible for determining the appropriate number for your location. ISP is not responsible for any long distance telephone charges.

Parameter	Value
Name Servers	208.249.78.2 12.16.44.3
Incoming Mail (POP3) Server	pop.prw.net
Incoming Mail (IMAP) Server	imap.prw.net
Outgoing Mail (SMTP) Server	smtp.prw.net
News Server	news.prw.net
Main Web Server	www.prw.net
Public FTP Server	ftp.prw.net
User Mail Address	username@prw.net
IP Address	Dynamic (set by server)
Netmask	255.255.255.0
User Web Directory (Public)	home.prw.net/~username username.web.prw.net
User Web Directory	home.prw.net /home/username/html